

NEW CYLINDRIQUE HAMMER PAJOT 4 200 C

SPECIFICATIONS

Approx. weight (without guide).....	4 273 kg
Approx. weight (with can)	7 000 kg
Impact energy at 8 bar	3 600 kg.m
Blow rate.....	140 BPM
Air required flow rate.....	27 000 to 30 000 l./m
Hose diameter.....	50 mm


This hammer can be fitted with :

- ⋮ 1 Pile guide up to Ø 1 220 mm
- ⋮ 1 sheet pile guide (single or double)
- ⋮ Under water job set-up

SPECIFIC BENEFITS OF THE NEW "C" HAMMERS

- ⋮ Less parts breakage risk
- ⋮ Less troubles and maintenance task
- ⋮ Reducing wear parts consumption
- ⋮ Easier breakdown diagnostic
- ⋮ More reliable and robust set-up
- ⋮ Easier guide system adaptable to all type of profil
(tube, H beam, double and single sheet pile, etc...)
- ⋮ Manufacturing time reduced



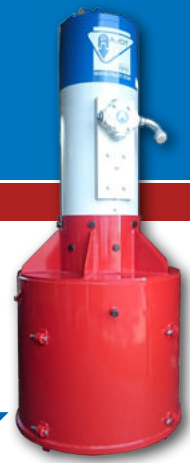

NEW CYLINDRIQUE HAMMER PAJOT 4 200 C

FURTHER INFORMATIONS

Maximum practical load able to be exerted on a pile : 171 tons.

Work capacity in a medium ground :

- ⋮ Sheet pile, 600 mm wide, 20 meters double sheet piles
- ⋮ Open tubes diam. 1 220 mm, 15 meters in ground

